





TECHNICAL DATA
FROM
Anemostat[®]
DOOR PRODUCTS
A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD
CARSON, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448

e-mail: sales@anemostat.com • website: www.anemostat.com

CHDL-2F
INVERTED V
NON-VISION LOUVER
LOUVER CORE WITH
FRAME TWO SIDES
NOT FIRE RATED

DETAIL DRAWING

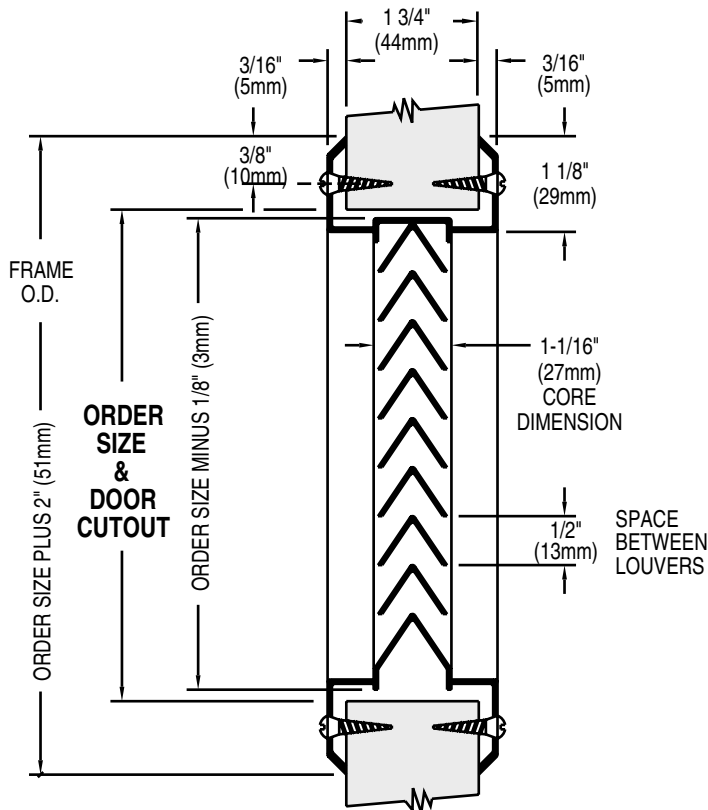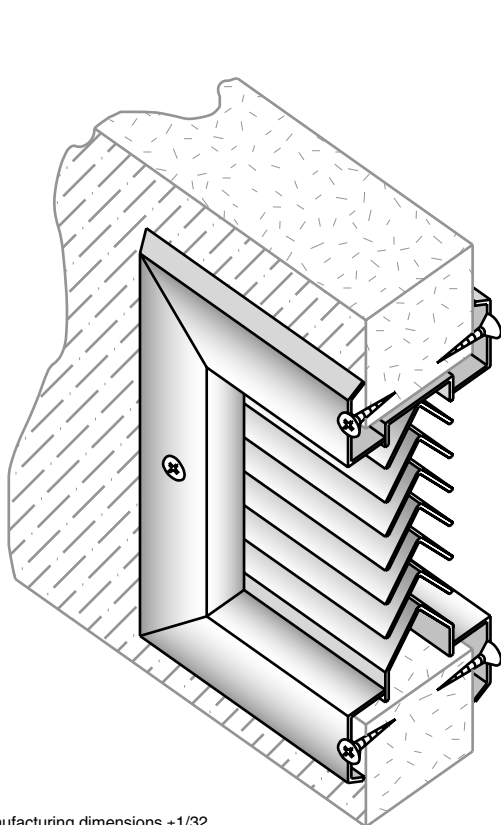

Anemostat manufacturing dimensions ±1/32
Actual dimensions are nominal and may vary
based on component manufacturers tolerances.

STANDARD PRODUCT FEATURES

- **MATERIAL:** 18 GA. Cold Rolled Steel - Frame.
22 GA. Cold Rolled Steel - Louver Blades.
- **FINISH:** Grey Primer, Beige or Bronze Baked Enamel.
- **INSTALLATION:** Fastens to door by means of #8x3/4" sheet metal or wood screws, directly into the door thru countersunk mounting holes.
- **DOOR THICKNESS:** For 1 3/4" Door (1 3/8" is available)
- **AESTHETICS:** Tight mitered corners, no visible welds make for a clean, sharp look.
- **USES:** Where 1/2" louver spacing is preferred.
- **FREE AIR FLOW:** 60% Free Area.

- **NOTE:** For Exterior use, High Humidity or Salt Air application, product must be Galvanized or Stainless Steel.

OPTIONAL FEATURES

- **MATERIAL:** #304 or #316 Stainless Steel, #4 Finish (Satin), Galvanized (Coil Hot Dipped or Electro Plated), Mill Finish or Anodized Aluminum (#5052 Alloy)
- **FINISH:** Custom Baked Enamel Colors (as per sample chip, supplied by customer).
- **FASTENERS:** Special Security Screw Fasteners, See Page 14, this section.
- **SPECIALS:** Fractional sizes (frame dimension is increased to accommodate odd size).
Mesh insect screens, loose or attached. (Galvanized, Aluminum, Charcoal Aluminum, Stainless Steel.)
For detail drawings see page 12 & 13, this section.
- **DOOR THICKNESS:** For 1 3/8" is available by special order.

FIRE RATINGS

- CHDL-2F is not fire rated.

Job Name & Location	Submitted by

(11/07)
554A102A

For Most Current Info, Consult Factory or check our website, www.anemostat.com

FEBRUARY 2004
LOUVERS PAGE 7