



TECHNICAL DATA

FROM

Anemostat®

DOOR PRODUCTS

A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD
 CARSON, CA 90745-4206
 (310) 835-7500 • FAX (310) 835-0448

e-mail: sales@anemostat.com • website: www.anemostat.com

LoPro™-RD

LO-PROFILE
 HALF CIRCLE
 METAL VISION FRAME



UNDERWRITERS'
 LABORATORIES

EN-1634

European Standard

FIRE
 RATINGS




WARNOCK
 HERSEY

B.S.-476.22


British Standard

DETAIL DRAWING

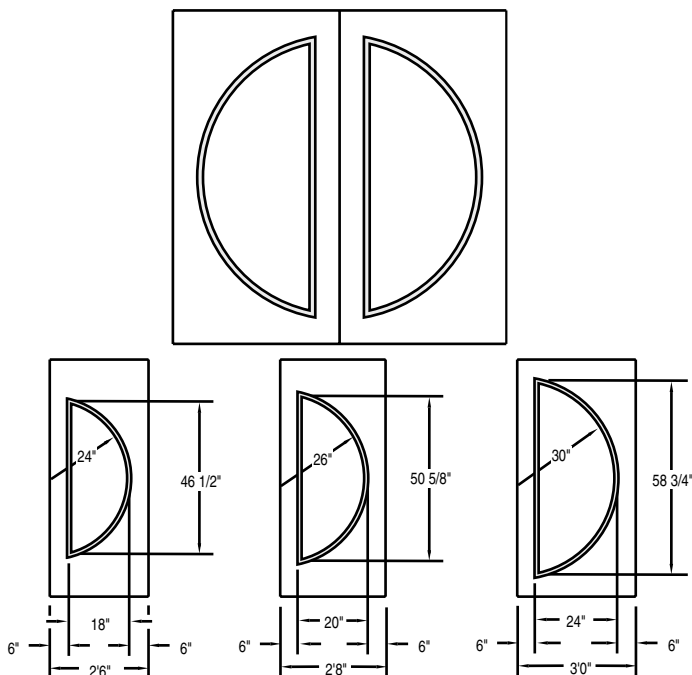

NOTE: Dimensions are to cutout, not external dimensions.

Anemostat manufacturing dimensions ±1/32
 Actual dimensions are nominal and may vary
 based on component manufacturers tolerances.

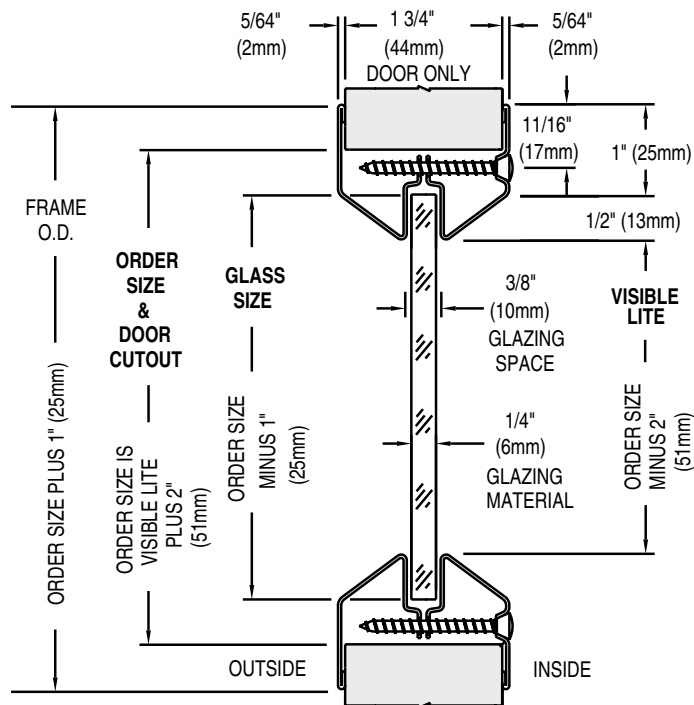

Recommendation: Do Not make Cutouts in Doors prior to receiving Custom Shaped Vision Frame

STANDARD PRODUCT FEATURES

- MATERIAL:** 20 GA. Cold Rolled Steel.
- FINISH:** Grey Primer, Beige or Bronze Baked Enamel.
- INSTALLATION:** Uses 1 3/4" sheet metal screws that pass through the door cutout, and fastens to the opposite side of the vision frame, thus eliminating the need to drill the door for thru bolts and saving installation time and labor. It also leaves the corridor side of the frame free of fasteners for added security and a cleaner, more aesthetic appearance.
- DOOR THICKNESS:** For 1 3/4" Wood or Metal Doors.
- GLAZING:** Should be 1/4", 3/16" or 5/16" fire and/or safety rated with U.L. and/or W.H.I. classification markings. Nominal glazing space of 3/8" allows for glazing tape to be used on both sides of the glass.
- AESTHETICS:** Tight mitered corners, beveled glass stop and low profile, provides a clean tapered look.
- STANDARD SIZES:** See drawings above. (Sold in separate units, i.e. LH or RH side).
- NOTE:** For Exterior use, High Humidity or Salt Air application, product must be Galvanized or Stainless Steel.
- IMPORTANT:** Interpretation of building and fire codes may vary. Consult with the local authority having jurisdiction in your area, to determine appropriate standards.

OPTIONAL FEATURES

- MATERIAL:** #304 or #316 Stainless Steel, #4 Finish(Satin), Galvanized (Hot Dipped, or Electro Plated).
- FINISH:** Custom Baked Enamel Colors (as per sample chip supplied). Plated Finishes to match the lock, hinges and closer.
- FASTENERS:** Special Security Screw Fasteners, See Page 31, this section.

FIRE RATINGS (w/ U.L. & W.H.I. classification markings) Positive Pressure

- 20 MINUTE:*** Approved listing at 3204 sq.in. visible lite (max. width 36", max. height 89").
 - 45/60 MINUTE:*** Approved listing at 2772 sq.in. visible lite (max. width 36", max. height 77").
 - 90 MINUTE:*** Approved listing at 1296 sq.in. visible lite (max. width 36", max. height 54").
 - 3 Hour:*** Approved listing at 100 sq.in. visible lite (max. width 12", max. height 33")
- * Must be used with FIRELITE Plus or NT and Fire listed glazing tape and be used in appropriately tested door assembly.

BS 476.22 Timber Doors - 30 min. and 1 hour. Tested to 254mm x 762mm
 British Standard Steel Doors - 2 hours (4 hours actual). Tested to 813mm x 813mm

EN-1634 30/60 min. integrity and insulation - Indicative Testing
 European Std.

- PLEASE NOTE:** On visible lite sizes larger than 1296 sq. in. on 20/45 min. and 100 sq. in. on 60/90/180 min., please consult with your Door / Frame Manufacturer's procedures, for their maximum glass size tested.

Job Name & Location	Submitted by
(3/08) 4A4A132	