


# SUBMITTAL SHEET



from: **ANEMOSTAT**®

**A MESTEK COMPANY**


CARSON CA  
310-835-7500

# MODEL RME

HOT WATER REHEAT  
SLIP AND DRIVE DISCHARGE

### THE BASIC DESIGN INCLUDES:

1. Corrosion Resistant Coated Steel Casing
2. No Access Doors Required
3. Acoustical Thermal Glass Fibre Insulation Coated to Prevent Erosion.  
Meets Requirements of NFPA Bulletin 90A & UL181.
4. Slip & Drive Type Connection for Maximum Installation Adaptability.
5. Easily Adjustable Relief Port Damper.
6. Nylon Bearings on Moving Parts.

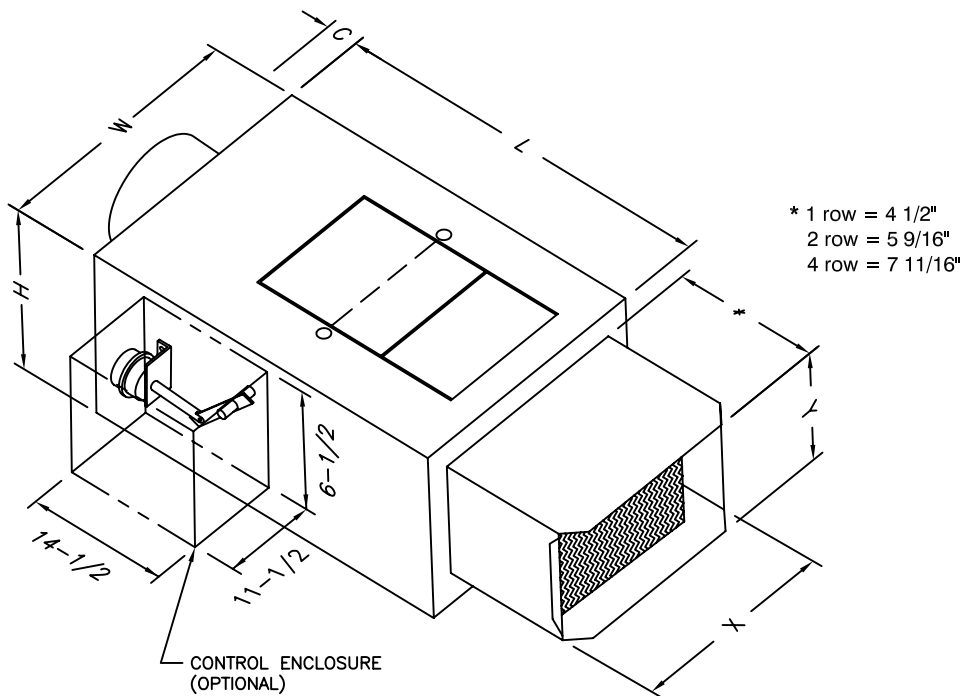

Box Size	CFM Range	Inlet	L	W	H	C	X	Y	COIL CONN. OD		
									1 ROW	2 ROW	4 ROW
5A	80-160	ø5	24-11/16	10	9-1/2	4	10	10	1/2	1/2	7/8
6A	120-300	ø6	24-11/16	10	9-1/2	4	10	10	1/2	1/2	7/8
7A	180-420	ø7	24-11/16	10	9-1/2	4	10	10	1/2	1/2	7/8
8A	240-500	ø8	24-11/16	10	9-1/2	4	10	10	1/2	1/2	7/8
8B	400-640	ø8	24-11/16	13	9-1/2	4	12	10	1/2	1/2	7/8
10C	600-900	ø10	27-11/16	20	11-1/2	4	12	10	1/2	1/2	7/8
12D	800-1400	ø12	27-11/16	20	13-1/2	4	14	12-1/2	1/2	1/2	7/8
14E	1200-1800	12x12	30-11/16	24	13-1/2	4	14	12-1/2	1/2	1/2	7/8
16E	1600-2400	16x12	30-11/16	24	13-1/2	4	14	12-1/2	1/2	1/2	7/8
18F	2100-3150	18x14	33-3/16	24	15-1/2	4	16	15	7/8	1/2	7/8

All Dimensions are in Inches

JOB NAME:	SUBMITTED BY:
LOCATION:	
ARCHITECT:	
ENGINEER:	
CONTRACTOR:	
	DWG # RME-S-0002
	DATE 11-9-10 REV G