

S-VENT[®] SUBMITTAL SHEET





Anemostat[®]
A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
e-mail: airsec@anemostat.com • website: www.anemostat.com

SSV432-FM
MAXIMUM SECURITY
DIFFUSER
without
FACEPLATE DEFLECTION
FACE MOUNTED with
REAR INSTALLATION PLATE

TOP SECTION

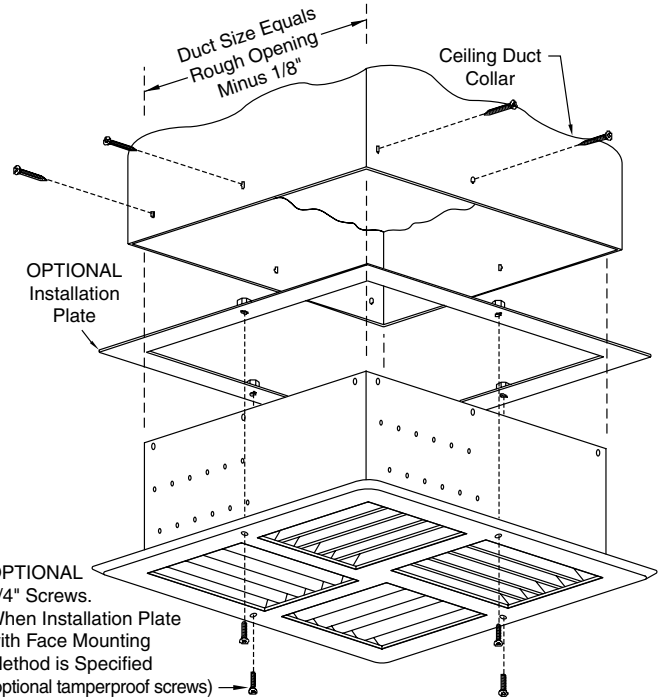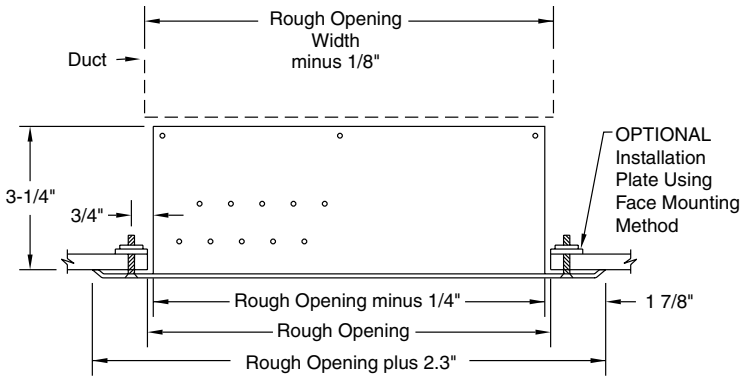


Grille Designation & Type	Rough Opening (inches)
SV432 - 8/8	08 x 08
SV432 - 12/12	12 x 12
SV432 - 16/16	16 x 16
SV432 - 20/20	20 x 20
SV432 - 24/24	24 x 24

Special Sizes available upon request.

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

THROW PATTERNS

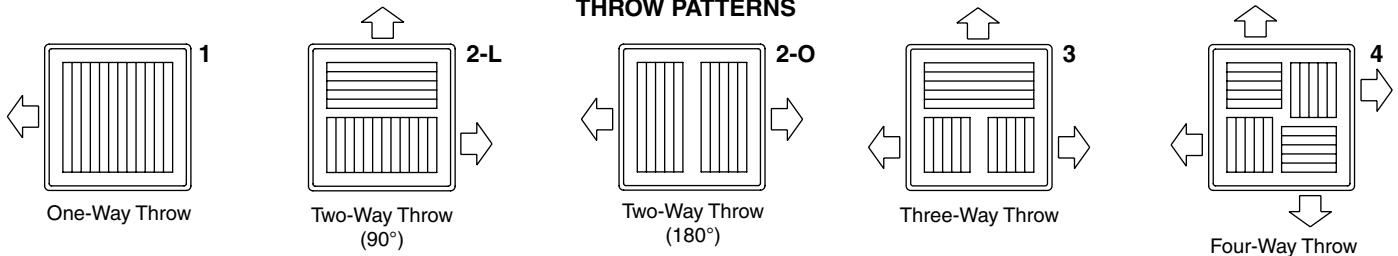

PRODUCT FEATURES

Face Flange

16 GA (standard)

Material Type

Stainless Steel (standard)

Horizontal Louvers/Vertical Mullions

16 GA with 3-1/4" Neck Depth (std)

Rear Installation Plate

14 GA (standard)

Finish

2B Mill Finish (std)

Beige Powder Coat-5 to 7 mil (opt)

White Powder Coat-5 to 7 mil (opt)

Other Powder Coat Colors _____

Sleeve (optional)

14 GA Galvanized - specify length _____

Locking Frame

1" x 1" x 3/16" (optional)

1" x 1" x 1/4" (optional)

1" x 1" x 1/8" (optional)

Opposed Blade Damper (optional) (galvanized, shipped loose)

Rear Operated

Anchoring Studs -(optional)

Nelson Type - specify stud size _____

QTY	ROUGH OPENING		THROW PATTERN
	W"	X H"	
27	9	9	2-L

SUBMITTAL APPROVAL

Job Name and Location			
Engineer	Date	Factory	Date
Mfr. Rep.	Date	Submitted By	Date

NOVEMBER 2007
NEW CONSTRUCTION
STAINLESS STEEL

S-VENT SECURITY PRODUCTS PAGE 17