SUBMITTAL SHEET

Anemostat®
A MESTEK COMPANY
P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
e-mail: airsec@anemostat.com • website: www.anemostat.com

ASSG-RR
MAXIMUM SECURITY
RISK RESISTANT
EXTRA HEAVY DUTY
GRILLE with STEEL
PERFORATED FACE

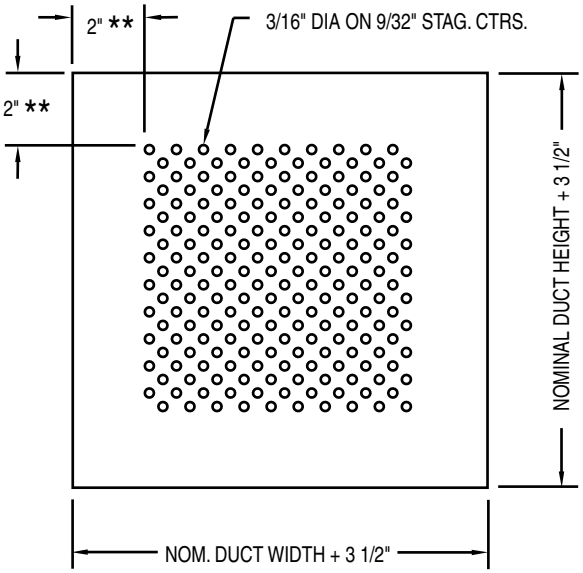

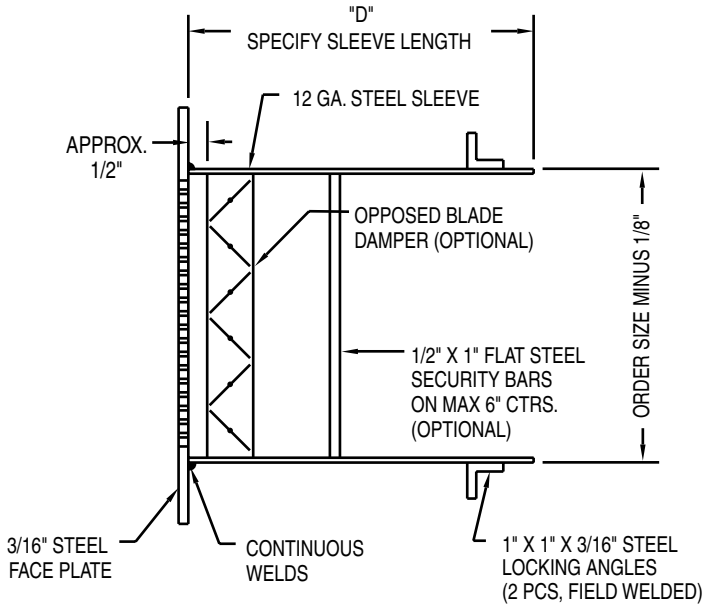

** 2" BORDER APPROXIMATE. THIS DIMENSION IS A FUNCTION OF SIZE AND PATTERN

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Face Plate
☐ 3/16" **(standard)** ☐ 12 GA. (optional)
☐ 10 GA. (optional) ☐ Other _____

Face Plate Patterns
☐ 3/16" dia. holes on 9/32" stag. ctrs. **(std.)**

Sleeve
☐ 12 GA. **(standard)** ☐ 3/16" (optional)
☐ 10 GA. (optional) ☐ Other _____

Locking Angles (two pieces)
☐ 1" x 1" x 3/16" **(standard)**
☐ 1-1/2" x 1-1/2" x 3/16" (optional)
☐ 2" x 2" x 3/16" (optional)
☐ Other _____

Material
☐ Cold Rolled Steel **(standard)**
☐ *Stainless Steel (optional)
☐ *Aluminum (optional)
☐ *Galvanized (optional)
☐ Other _____
*consult factory for availability

Security Bars -(optional)
☐ 1/2" x 1" flat steel (max. 6" ctrs.)
☐ Other _____

Opposed Blade Damper -(optional)
☐ Front Operated
☐ Rear Operated
☐ Other _____

Anchoring Studs -(optional)
☐ Nelson Type (3" x 3/8")
☐ Other _____

Locking Frame -(optional)
☐ 1" x 1" x 3/16" (field welded)
☐ Other _____

Adapter -(optional)
☐ Square to round (shipped loose)

Finish
☐ White Powder Coat **(standard)**
☐ Rust Inhibiting Prime Coat (optional)
☐ Other _____

Other Options (please specify)
_____

Qty.	Order Size (Nominal Duct) W" x H"		Sleeve Length D

SUBMITTAL APPROVAL

Job Name and Location	
Engineer Date	**Factory** Date
Mfr. Rep. Date	**Submitted By** Date