

APPLICATION

- Series type, fan assisted air terminals with integral electric heating coil
- Provide electric resistance heating to perimeter spaces during occupied periods and night shut down modes. Night cycling temperature control with central fan systems shut down.

FEATURES

Same as Model ESTS plus:


- Integral electric heating coil with nickel-chrome resistance wire
- Primary, auto reset thermal cutout
- Air flow switch for proof of air flow
- 24vac Class II transformer (unfused) as required for 24vac control systems
- PE switches for pneumatic control systems
- Magnetic de-energizing contactor per step
- Accepts flanged discharge duct connection
- Left hand control and heater cabinet position are standard



OPTIONS & ACCESSORIES

Same as Model ESTS plus:

- Door interlocking disconnect switch, non-fused
- Power fusing (fuses & fuse blocks)
- Manual reset secondary thermal cutout
- SSR modulating controller

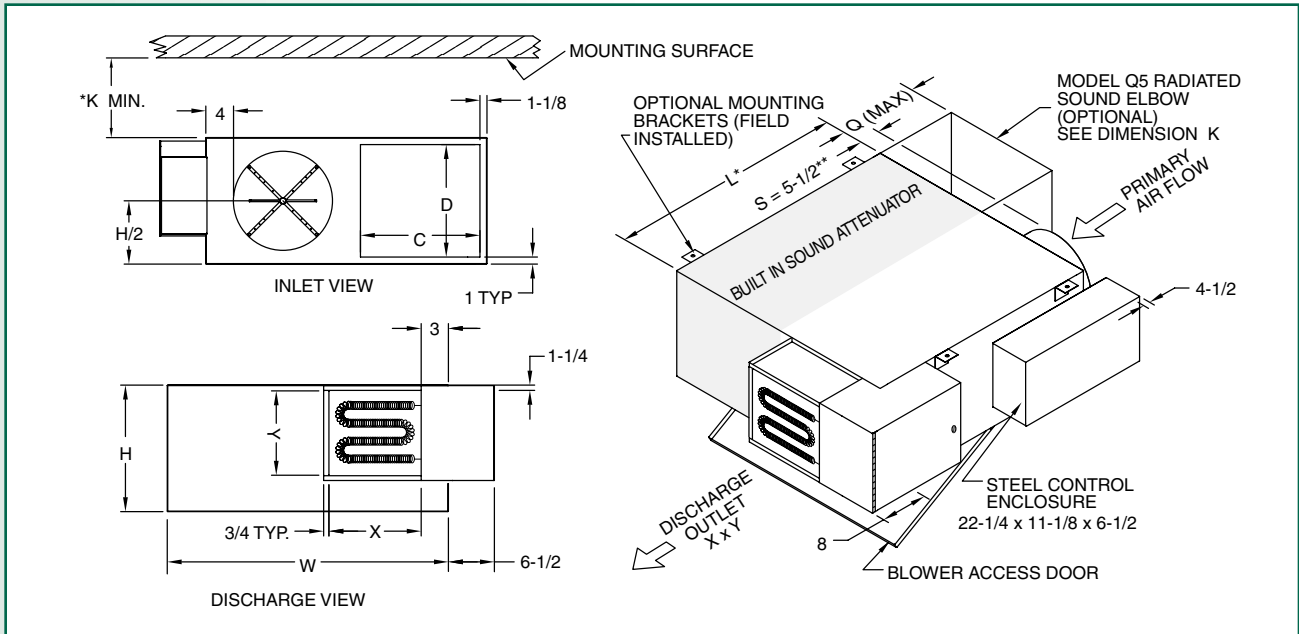

Model Number ESTE	Motor H.P.	Nominal Inlet Diameter	Height H	Width W	Length L	Min. K	Discharge		Induction			Est. Wt. LB
							X	Y	C	D	Q	
3306, 3307, 3308 3309, 3310	1/3	6, 7, 8, 9, 10	18	32	36	6	11-1/2	11	12	16	18	146
5006, 5007, 5008, 5009 5010, 5012, 5014	1/2	6, 7, 8, 9 10, 12, 14	18	40	40	6	14	12	17	16	18	162
7507, 7508, 7509 7510, 7512, 7514	3/4	7, 8, 9 10, 12, 14	20	48	48	8	19	16	21	18	20	217
1009, 1010, 1012 1014, 1016	1	9, 10, 12 14, 16	20	48	48	8	19	16	21	18	20	224