


EZTA Units with Integral Sound Attenuator

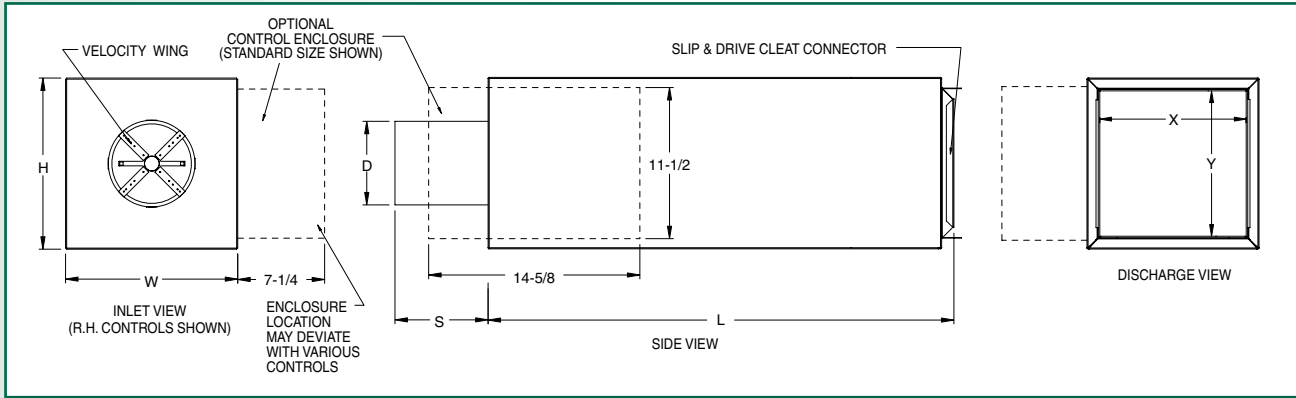


EZTA Units

Inlet Size	CFM Range	(inches)							Weight (lbs)
		D	W	H	X	Y	L	S	
05	0 - 350	4 7/8	10	10	8 3/4	8 3/4	39 1/2	5 3/8	20
06	0 - 500	5 7/8	10	10	8 3/4	8 3/4	39 1/2	5 3/8	20
07	0 - 675	6 7/8	12	10	10 3/4	8 3/4	39 1/2	5 3/8	22
08	0 - 900	7 7/8	12	10	10 3/4	8 3/4	39 1/2	5 3/8	22
09	0 - 1100	8 7/8	14	12 1/2	12 3/4	11 1/4	39 1/2	5 3/8	28
10	0 - 1400	9 7/8	14	12 1/2	12 3/4	11 1/4	39 1/2	5 3/8	28
12	0 - 2000	11 7/8	16	15	14 3/4	13 3/4	39 1/2	5 3/8	32
14	0 - 3000	13 7/8	20	17 1/2	18 3/4	16 1/4	39 1/2	5 3/8	39
16	0 - 4100	15 7/8	24	17 1/2	22 3/4	16 1/4	39 1/2	5 3/8	44
24x16	0 - 7000	24x16	38	18	38	18	42	5 7/16	109

Notes:

- Control enclosure is optional on all units.
- Weights are approximate and will vary based on selected options, insulation type, etc.
- Control enclosures add 5 lbs. to unit weight.
- Right hand connection shown.

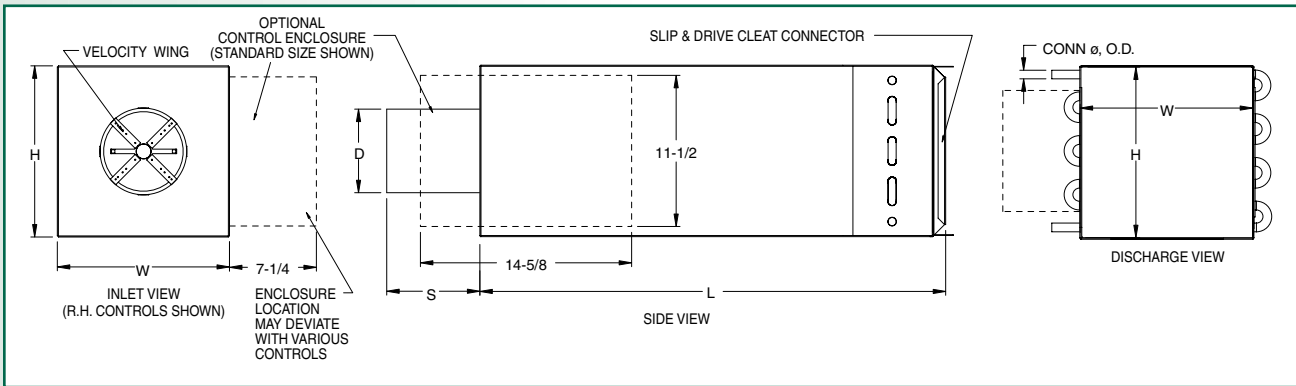

EZTA Units with Hot Water Heating Coil

Inlet Size	CFM Max.	Outlet Size W x H	1 Row			2 Row			4 Row		
			L	Conn.OD	Wgt	L	Conn.OD	Wgt	L	Conn.OD	Wgt
05	350	10 10	43 1/4	1/2	25	44 5/16	1/2	27	46 7/16	7/8	32
06	500	10 10	43 1/4	1/2	25	44 5/16	1/2	27	46 7/16	7/8	32
07	675	12 10	43 1/4	1/2	28	44 5/16	1/2	31	46 7/16	7/8	36
08	900	12 10	43 1/4	1/2	28	44 5/16	1/2	31	46 7/16	7/8	36
09	1100	14 12 1/2	43 1/4	1/2	35	44 5/16	1/2	39	46 7/16	7/8	47
10	1400	14 12 1/2	43 1/4	1/2	35	44 5/16	1/2	39	46 7/16	7/8	47
12	2000	16 15	43 1/4	7/8	41	44 5/16	1/2	47	46 7/16	7/8	56
14	3000	20 17 1/2	43 1/4	7/8	51	44 5/16	7/8	59	46 7/16	7/8	73
16	4100	24 17 1/2	43 1/4	7/8	58	44 5/16	7/8	66	46 7/16	7/8	82
24x16	7000	38 18	47	7/8	131	47	7/8	142	48	1-1/8	165

Notes:

- Male solder connections
- Right and left hand connections available.

Note: All other dimensions same as EZTA