


Model EZTS Basic Assembly

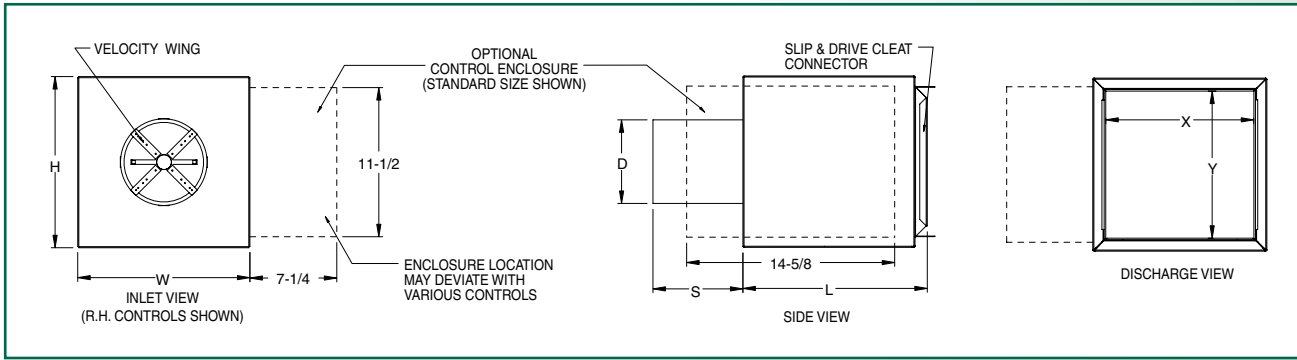


EZTS Units

Inlet Size	CFM Max.	(inches)							Weight (lbs)
		D	W	H	X	Y	L	S	
05	350	4 7/8	10	10	8 3/4	8 3/4	12 1/2	5 3/8	9
06	500	5 7/8	10	10	8 3/4	8 3/4	12 1/2	5 3/8	9
07	675	6 7/8	12	10	10 3/4	8 3/4	12 1/2	5 3/8	11
08	900	7 7/8	12	10	10 3/4	8 3/4	12 1/2	5 3/8	11
09	1100	8 7/8	14	12 1/2	12 3/4	11 1/4	14 1/2	5 3/8	15
10	1400	9 7/8	14	12 1/2	12 3/4	11 1/4	14 1/2	5 3/8	15
12	2000	11 7/8	16	15	14 3/4	13 3/4	18 1/2	5 3/8	19
14	3000	13 7/8	20	17 1/2	18 3/4	16 1/4	18 1/2	5 3/8	23
16	4100	15 7/8	24	17 1/2	22 3/4	16 1/4	18 1/2	5 3/8	28
24x16	7000	24x16	38	18	38	18	30	5 7/16	79

Notes:

- Control enclosure is optional on all units.
- Weights are approximate and will vary based on selected options, insulation type, etc.
- Control enclosures add 5 lbs. to unit weight.
- Right hand connection shown.

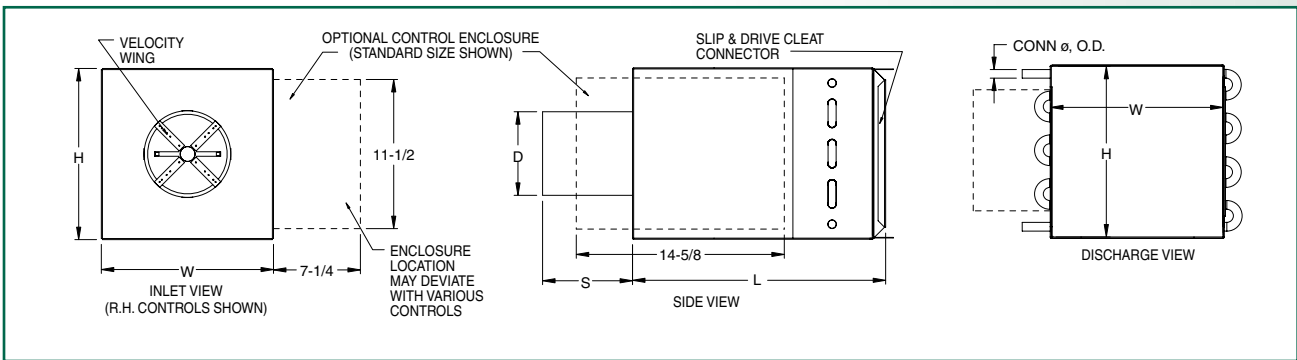

EZTS Units with Hot Water Heating Coil

Inlet Size	CFM Max.	Outlet Size		1 Row			2 Row			4 Row		
		W	H	L	Conn.OD	Wgt	L	Conn.OD	Wgt	L	Conn.OD	Wgt
05	350	10	10	16 1/4	1/2	14	17 5/16	1/2	16	19 7/16	7/8	21
06	500	10	10	16 1/4	1/2	14	17 5/16	1/2	16	19 7/16	7/8	21
07	675	12	10	16 1/4	1/2	17	17 5/16	1/2	20	19 7/16	7/8	25
08	900	12	10	16 1/4	1/2	17	17 5/16	1/2	20	19 7/16	7/8	25
09	1100	14	12 1/2	18 1/4	1/2	22	19 5/16	1/2	26	21 7/16	7/8	34
10	1400	14	12 1/2	18 1/4	1/2	22	19 5/16	1/2	26	21 7/16	7/8	34
12	2000	16	15	22 1/4	7/8	28	23 5/16	1/2	34	25 7/16	7/8	43
14	3000	20	17 1/2	22 1/4	7/8	35	23 5/16	7/8	43	25 7/16	7/8	57
16	4100	24	17 1/2	22 1/4	7/8	42	23 5/16	7/8	50	25 7/16	7/8	66
24x16	7000	38	18	35	7/8	101	35	7/8	112	36	1-1/8	135

Notes:

- Male solder connections
- Right and left hand connections available.

Note: All other dimensions same as EZTS