

S-VENT[®] SUBMITTAL SHEET





Anemostat[®]
A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
e-mail: airsec@anemostat.com • website: www.anemostat.com

SV432-DM
MAXIMUM SECURITY
DIFFUSER
without
FACEPLATE DEFLECTION
DUCT MOUNTED

TOP SECTION

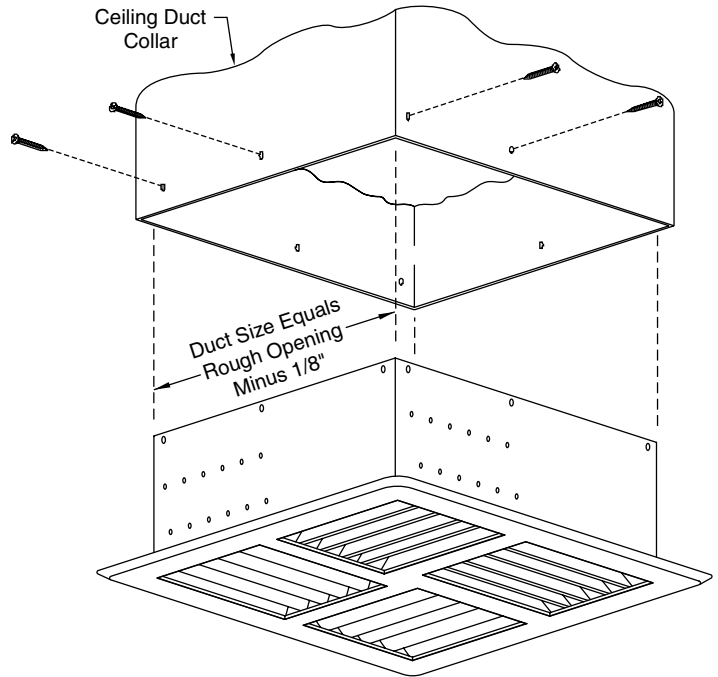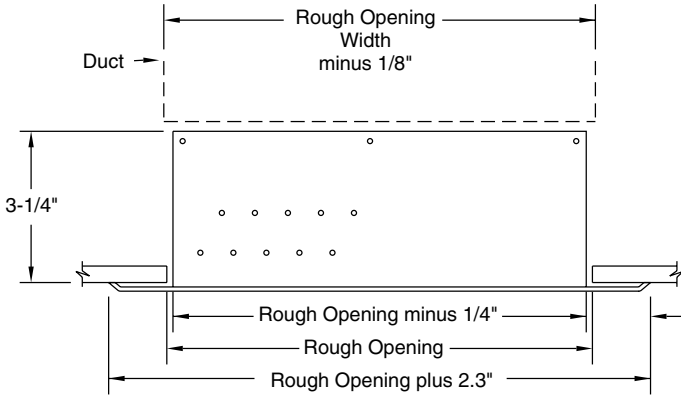


Grille Designation & Type	Rough Opening (inches)
SV432 - 8/8	08 x 08
SV432 - 12/12	12 x 12
SV432 - 16/16	16 x 16
SV432 - 20/20	20 x 20
SV432 - 24/24	24 x 24

Special Sizes available upon request.

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

THROW PATTERNS

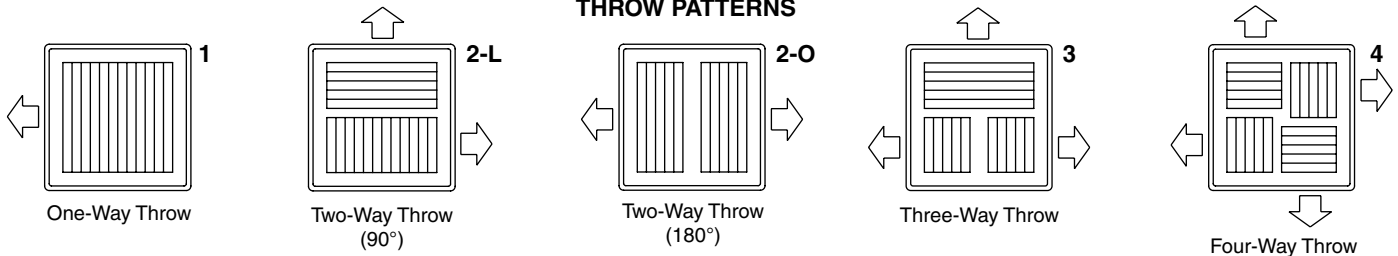

PRODUCT FEATURES

Face Flange

- 16 GA (standard)

Material Type

- Cold Rolled Steel (standard)

Horizontal Louvers

- 16 GA with 3-1/4" Neck Depth (std)

Finish

- Beige Powder Coat-5 to 7 mil (std)
 White Powder Coat-5 to 7 mil (opt)
 Other Powder Coat Colors _____

Sleeve (optional)

- 12 GA - specify length _____

Locking Frame

- 1" x 1" x 3/16" (optional)
 1" x 1" x 1/4" (optional)
 1" x 1" x 1/8" (optional)

Opposed Blade Damper (optional) (shipped loose)

- Rear Operated

Anchoring Studs -(optional)

- Nelson Type - specify stud size _____

QTY	ROUGH OPENING		THROW PATTERN
	W"	X H"	
27	9	9	2-L

SUBMITTAL APPROVAL

Job Name and Location			
Engineer	Date	Factory	Date
Mfr. Rep.	Date	Submitted By	Date

NOVEMBER 2007
NEW CONSTRUCTION
S-VENT SECURITY PRODUCTS PAGE 13