MODEL
- ❑ **XEZTS** - Basic Assembly
- ❑ **XEZTA** - with Integral Sound Attenuator

INLET SIZE
- ❑ 5" Ø
- ❑ 6" Ø
- ❑ 7" Ø
- ❑ 8" Ø
- ❑ 9" Ø
- ❑ 10" Ø
- ❑ 12" Ø
- ❑ 14" Ø
- ❑ 16" Ø
- ❑ 24"x16"

CASING CONSTRUCTION
- ❑ Galvanized Steel
- ❑ 304 Stainless Steel
- ❑ 316 Stainless Steel
- ❑ Aluminum

- ❑ 22 Gauge
- ❑ 20 Gauge

CASING TREATMENTS
- ❑ 1/2" Matte Insulation
- ❑ 1" Matte Insulation

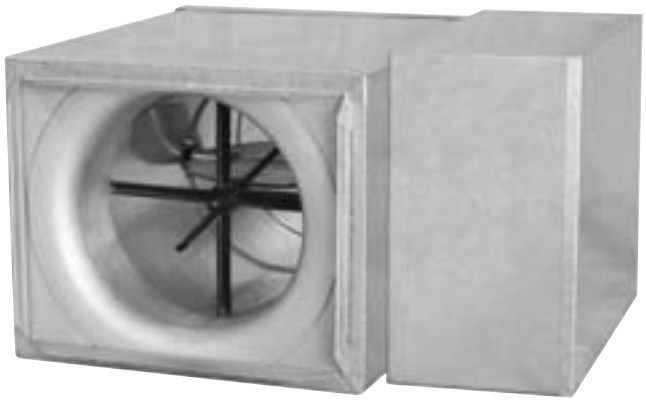

CONTROL SYSTEM
- ❑ Pneumatic Controls
- ❑ Electronic Analog Controls
- ❑ Direct Digital Controls (DDC)
- ❑ Electric Controls

Control strategies available for all applications

CONTROL SIDE
- ❑ Right Side
- ❑ Left Side

ACCESSORIES

ACCESS DOORS (XEZTA ONLY)
- ❑ Bottom
- ❑ Side
- ❑ Patch Plate
- ❑ Hinged Camlock
- ❑ Double Camlock

CASING OPTIONS
- ❑ Unit Mounting Bracket (shipped loose)
- ❑ Manual Damper Locking
- ❑ Standard Control Enclosure
- ❑ Large Control Enclosure
- ❑ Hinged Front Panel (control enclosure)